





Rod Knuckle™ Operation Diagram

Two places to use spanner wrench for access to the packing.

Two thumb screws must also be loosened for access to the packing. They must be re-tightened after each service. (finger-tight only)

Set-screw is used to secure knuckle

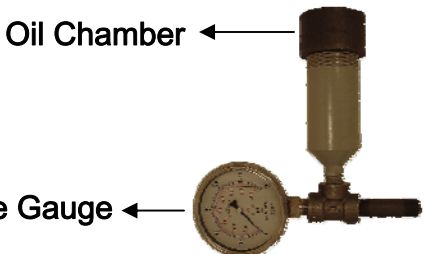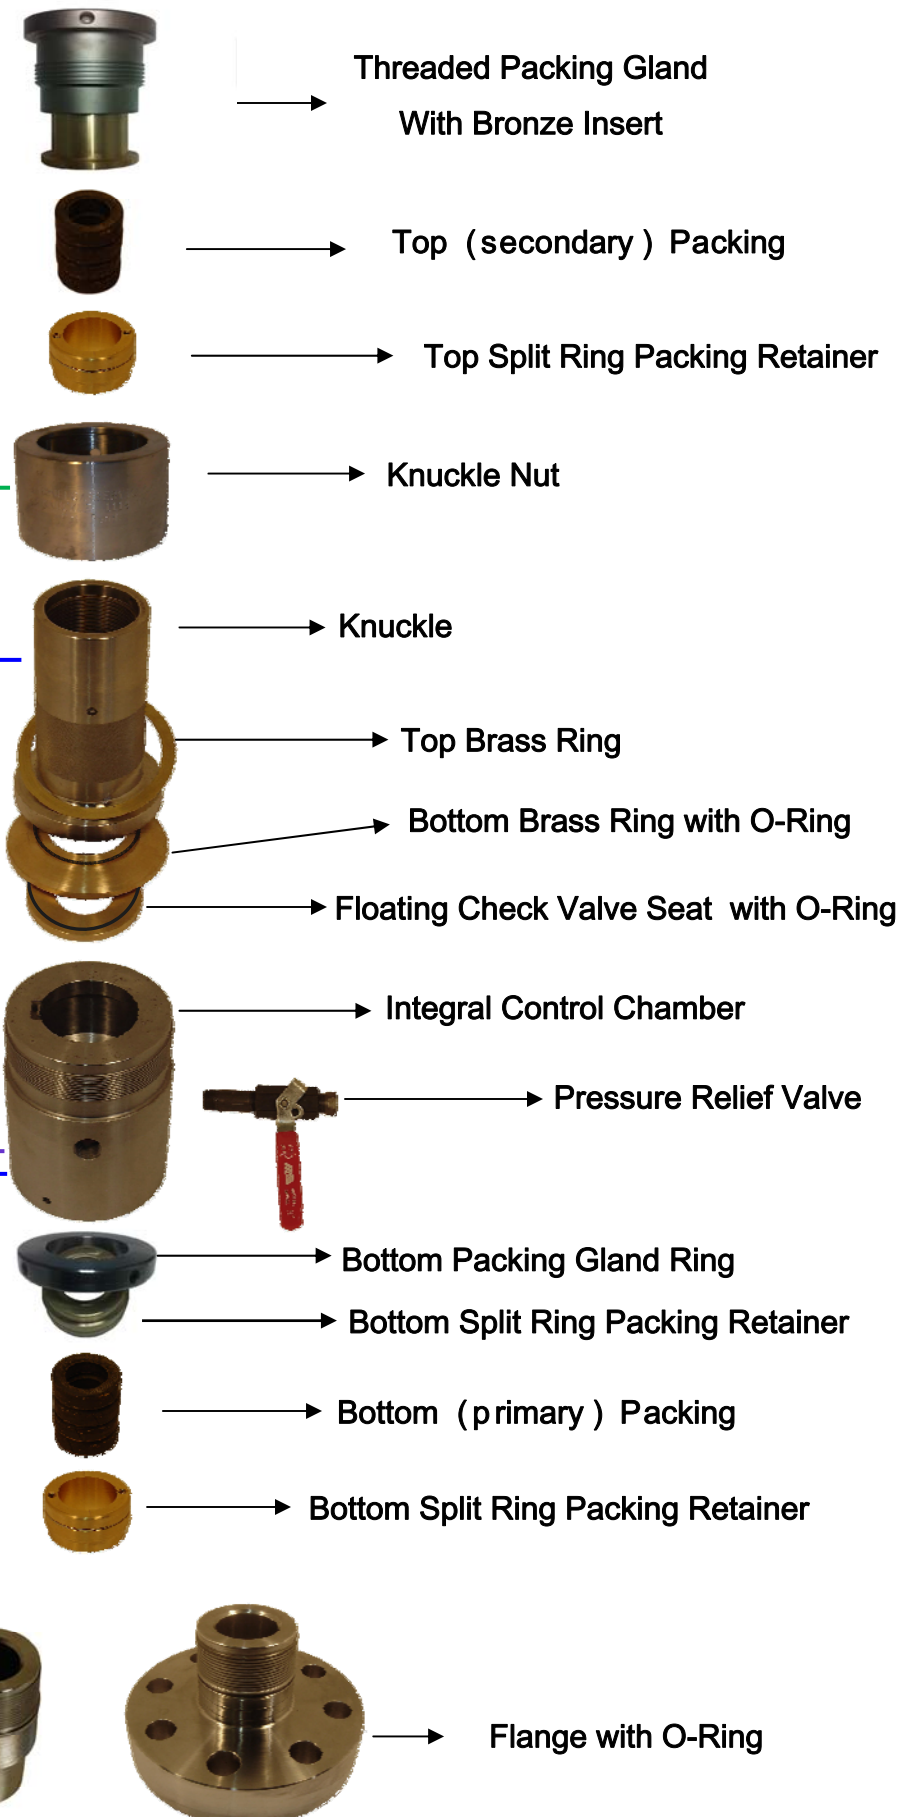

Flow Tee Adapter with O-Ring

Flange with O-Ring